



The WT1200 FLOW TOTALIZER is designed to be used in conjunction with the ACCUTRAX FLOW METER. This indicator / totalizer accepts the 5 volt DC pulse from the Accutrax flow meter and converts the signal into engineering units, such as gallons, liters, gallons per hour, cubic centimeters per minute, etc. as desired by the application.

Electronic Flow Monitoring

The WT1200 provides on-line monitoring of the chemical injection process and can be used to track the total amount of chemical used or injected.




SPECIFICATIONS

- Computerized continuous flow rate every 2 - 3 strokes
- Flow rate and two independently resettable totals
- Pulse output, i.e., 1 pulse/cc or 1 pulse/gal.
- 4 to 20 output of computed continuous flow rate
- High / low alarms
- Power supply of 20 - 30 VDC or 110 VAC
- Power supply to Accutrax of 15 VDC
- LED display
- 3.75" W x 3.75" H x 6.5" D
- General purpose electrical rating




WT1200 FLOW TOTALIZER

APPLICATIONS

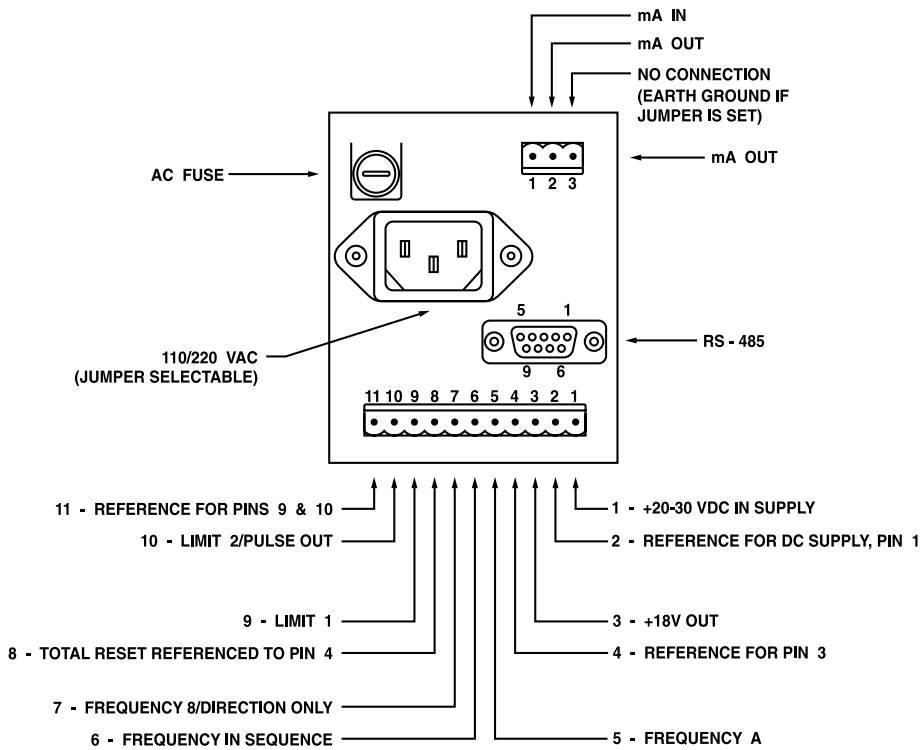

FlowTracking Controller Configuration

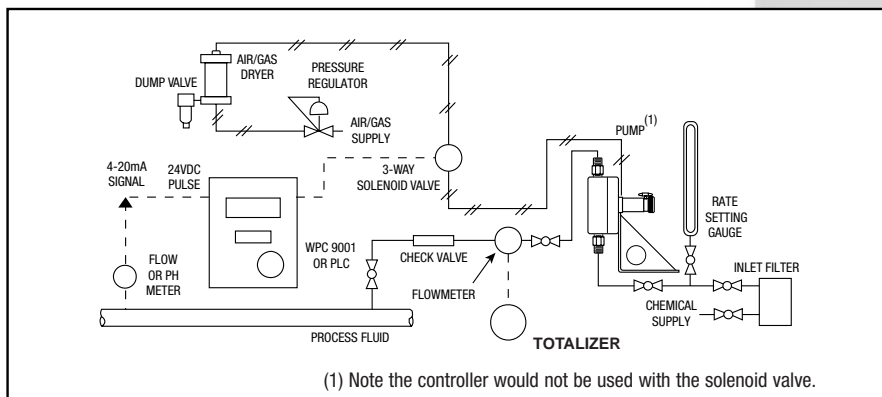

For more info contact us at:

